



**Increase the  
flow of natural  
light through  
your home**

# Fixed Flat Rooflight



**QUICK DELIVERY ON  
STANDARD STOCK SIZES**

500mm x 500mm  
600mm x 900mm  
600mm x 1200mm  
600mm x 1800mm

1000mm x 1000mm  
1000mm x 1500mm  
1000mm x 2000mm  
1000mm x 2500mm  
1000mm x 3000mm

**Quick & Easy Installation**

- ✓ **U-Value 1.2 w/m<sup>2</sup> – Double Glazed**
- ✓ **Quick and easy installation**
- ✓ **Glazed into an Anthracite Grey (RAL 7016) Aluminium Frame with thermal break**

- ✓ **U-Value 0.7 w/m<sup>2</sup> – Triple Glazed**
- ✓ **Toughened safety glass as standard**
- ✓ **Manufactured with a decorative border as standard**

**Also available in bespoke sizes**

## PRODUCT INFORMATION

Our Framed Rooflights help increase the flow of natural light into indoor spaces, whilst being low-maintenance with excellent thermal insulation and light transmission.

The glass that we use in our rooflights is an energy efficient glass which is designed to prevent heat escaping out through your rooflight to the cold outdoors.



## KEY FEATURES

- U-Value 1.2 w/m<sup>2</sup> – Double Glazed
- U-Value 0.7 w/m<sup>2</sup> – Triple Glazed
- Glazed into an Anthracite Grey (RAL 7016) aluminium frame with thermal break
- Available in both standard and bespoke sizes
- Quick and easy installation
- Manufactured with a decorative border as standard
- Available in a range of glass finishes
- Toughened Safety Glass as standard

## ALUMINIUM FRAME

The Aluminium Frame features a thermal break in the frame which creates an insulated barrier and minimises the transfer of heat and cold through the frame reducing condensation and improving energy efficiency.

### Thermal Broken Aluminium Flat Rooflight Profile

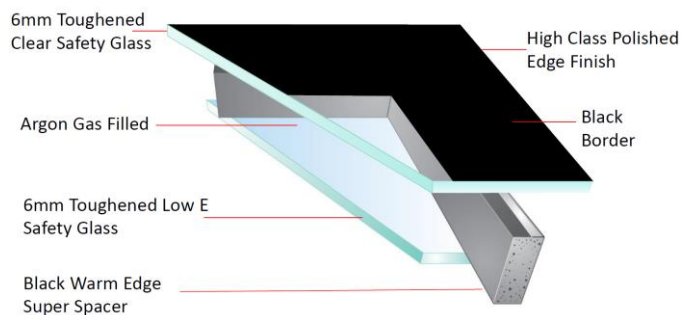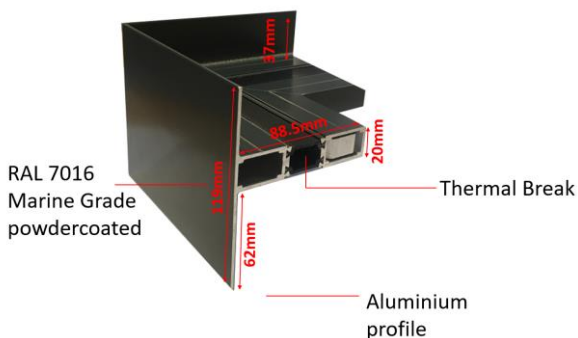

## GLASS SPECIFICATION

The Double Glazed glass has a centre pane U-value of 1.2 and the Triple Glazed glass has a U-value of 0.7 which is 30% better than rooflights with standard double glazing and enhanced sound reduction.

All units are Argon gas filled and have Thermal Super Spacer technology as standard.

The outer panel can be supplied in either clear, solar or privacy glass to suit your needs.



01623 624500



info@lbsupplies.co.uk

### Manufactured Standards

BS EN-12150

BS EN-1279