


# STANDING SEAM FLASHING

KSS

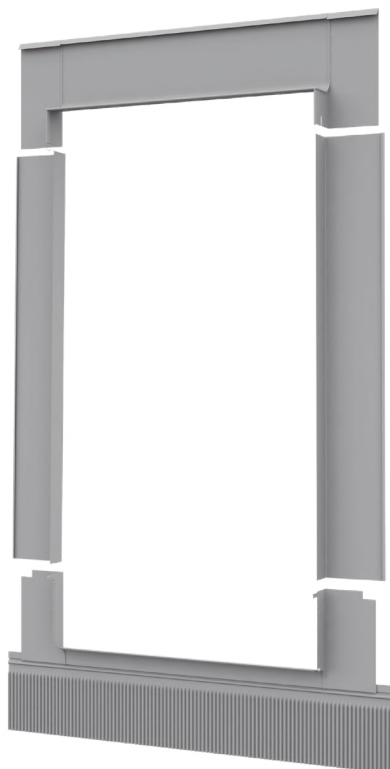

## APPLICABLE

- In roof pitch range of 15°-90°
- For special steel roofing materials with standing seam connections
- Developed to fit "click system" steel roofing

## FEATURES


- Perfect watertightness
- Easy installation
- Weather and UV ray resistant
- Lead free components
- Packaging contains all the necessary components for the installation. No additional purchase is needed for the installation.

## MATERIAL

- Aluminium
- Powder coated grey, RAL7043

## AVAILABLE SIZES [cm]

|            |            |            |            |            |            |             |            |            |            |
|------------|------------|------------|------------|------------|------------|-------------|------------|------------|------------|
|            |            |            |            |            |            |             |            |            |            |
| <b>C2A</b> | <b>C4A</b> | <b>F6A</b> | <b>M4A</b> | <b>M6A</b> | <b>M8A</b> | <b>M10A</b> | <b>P6A</b> | <b>P8A</b> | <b>S6A</b> |
| 55x78      | 55x98      | 66x118     | 78x98      | 78x118     | 78x140     | 78x160      | 94x118     | 94x140     | 114x118    |



[www.dakea.com](http://www.dakea.com)

