



**Special
Features & Benefits:**

- Comfort Switch input
- Smoke detector input
- Easy Fire Zone setup
- Built-in Buzzer
- 2-wire Powerline connection
- Thermostat function

Intelligent Firemans Priority Switch, IP30
for Actulux smoke ventilation systems

Intelligent Firemans Priority Switch for Smoke Ventilation Systems

EASY INSTALLATION AND OPERATION

Fireman's Priority Switch is easy to install and operate. It is developed to be used together only with Actulux **SVL Control Panels**.

The unit has highest priority and will allow firemen to override any other alarm activations.

INDICATION ON FRONT PANEL (LED BOARD):

Green Ok LED = the actual zone is ok.

Yellow Fail LED = the actual zone is in fail.

Red Alarm LED = the actual zone is in alarm.

Blue LED = the smoke vent is open or closed.

The open / close indication can also be seen on comfort switch with built-in LED:

Item no. 111943: 1 zone

Item no. 111944: 2 zones

RESET is possible directly at the Firemans Priority Switch.


OPERATION INSTRUCTIONS

The OPEN-switch sets the zone in open mode condition. If the control panel is not already in fire mode, it will enter fire mode condition after this activation.

The CLOSE-switch sets the zone in closed mode condition for 180 seconds, and the zone remains in fire mode condition.

A rotary switch sets the fire zone of the iFPS.

On the Primary version, input for Smoke/Heat sensor and comfort switch are available.

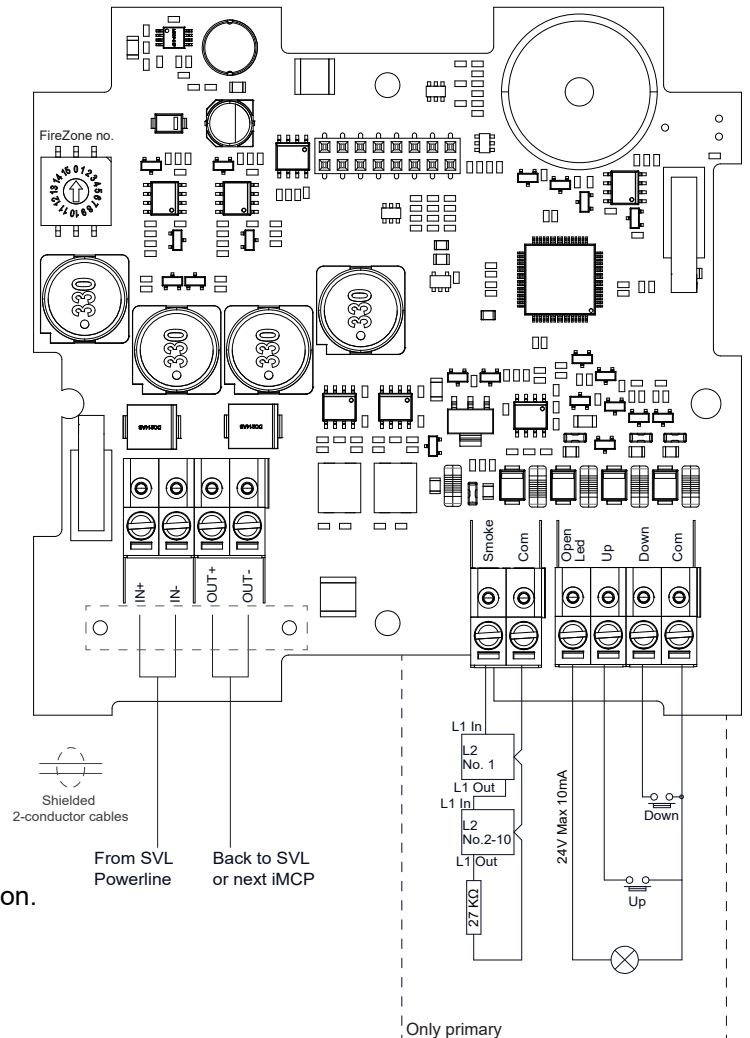

SPECIFICATIONS

Function: Manual override of alarm to open or close smoke vent, buzzer

LED indication: "ok"(green), "error" (yellow), "alarm activated" (red), Window Open (blue)

Size: 125 mm x 125 mm x 38 mm (W x H x D)

Colour: Orange (can be delivered in grey on request)

Comfort: Unlimited number of mechanical comfort switches without LED indication - max. 10 pcs. with LED indication (max. 10 mA)

Detector (smoke/heat) input with line detection / Max. power consumption for detectors = 1 mA ≈ approx. 10 detectors

IP rating: IP30

Consumption on AC error: 5 mA

Item no.: 511940 (Orange) Primary with Smoke and Comfort input

Item no.: 511939 (Grey) Primary with Smoke and Comfort input

Item no.: 511960 (Orange) Secondary without Smoke and Comfort input

Item no.: 511959 (Grey) Secondary without Smoke and Comfort input